


Edgewater Fire

Thickness	1-3/4" Standard
Maximum Sizes	Single 4-0 x 8-0, Pairs 8-0 x 8-0
Weight	Avg. for flush doors 5.7 lbs. per sq. ft.
Screw Withdrawal	Avg. per screw: Stiles 965 ft. lbs., Blocking & Rails 1,214 ft. lbs.
Core	Mineral
Stiles	2" High Density Fire Rated Material with a HDU outer edge concealing the intumescent. HDU can be planed up to 1/8" to fit irregular openings.
Rails	2" High Density Fire Rated Material with HDU outer edge. Top rail has concealed intumescent.
Blocking	High Density Fire Rated Material. Each door will have a lock block for the latching device. Additional blocking available as required by specifications.
Core Assembly	All internal components are securely bonded together.
Face Sheets	.090 or .120 thick FRP in smooth
Machining	Complete machining for approved hardware, including electrified with raceway.
Lights	Metal vision kits to maximum 720 sq. inches and up to 90 minutes.
Cutouts	Minimum dimensions from door edge to cutout: stiles and top rail 5", bottom rail 10", between cutouts 5".
Finish Options	Primed, stock paint colors, custom matched paint
Tested Standards	UL 10C, NFPA 252 & CAN/ULC S104
Warranty	Life of the product against corrosion induced failure and 10 years after the date of the purchase on workmanship. Factory finishes are warranted for one year from date of purchase. * See complete warranty for details.

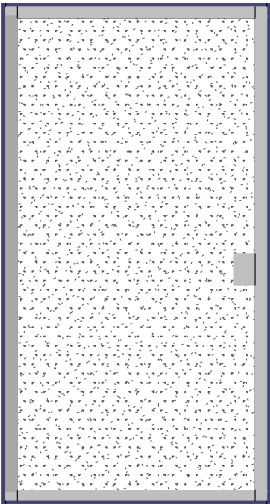

Edgewater Door Company reserves the right to change design and/or details of its products without notice.